
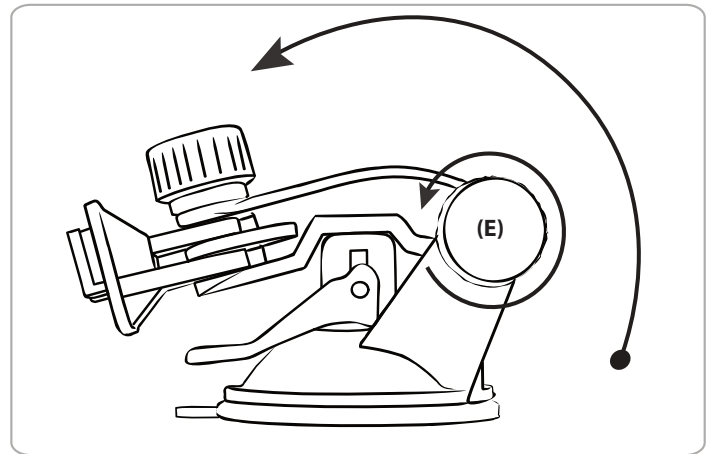



CM014-2 | TravelMount™ Windshield Suction Pedestal with Lateral Head

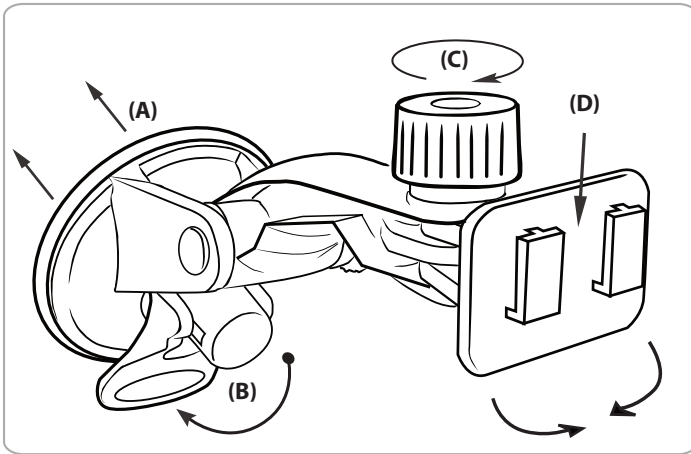

Pedestal installation and Adjustment

- Step 1. Push the pedestal suction cup (A) firmly to the windshield. Flip the lever (B) down to secure the suction cup..
- Step 2. Adjust the lateral angle of the pedestal head (D) by loosening the adjustment knob (C).

- Step 3. Adjust the angle of the pedestal arm by loosening the adjustment knob (E).

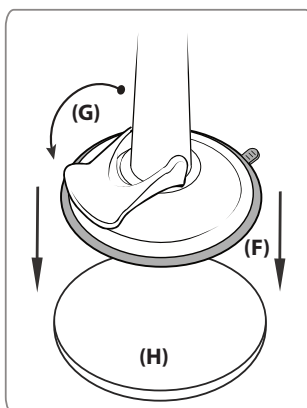

Dash Installation (AP036 adhesive disc sold separately)

- Step 1. Locate a safe flat surface on the dash or console to mount the pedestal. Clean the dash with the alcohol pad provided. Let the dash surface dry before applying the adhesive disc (H).
- Step 2. Push the pedestal suction cup (F) firmly to the disc (H). Flip the lever (G) down to secure the suction cup.

⚠ Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon Resources, Inc. is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of the pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:
(USA) (800) 841-0884
(INT'L) (626) 254-9005
Mon-Fri. 9am-5pm, PST

www.arkon.com
Arcadia, CA 91006 USA
Made in Taiwan

© Copyright 2007 Arkon Resources, Inc.