

GN115 - GN014 | Windshield Suction Mount for Garmin® Nüvi™


Travelmount™ windshield, console, or dash mount for Garmin® Nüvi™ and StreetPilot™ portable GPS devices.

Compatible with ALL Garmin Nüvi portable navigation devices including: Nüvi 200, 200w, 205, 205w, 250, 250w, 255, 255w, 260, 260w, 265T, 265WT, 270, 275T, 300, 300T, 310, 310T, 350, 360, 360T, 370, 370T, 500, 550, 600, 610, 650, 660, 670, 680, 710, 750, 755T, 760, 760T, 765T, 770, 775T, 780, 785T, 850, 855, 860, 880, 885T, 1200, 1250, 1260T, 1300, 1350, 1350T, 1370T, 1390T, and 5000


Compatible with Garmin StreetPilot models: c310, c510, c530, c555, and c580

1. Choose the best location in the vehicle to place the mount. **Do not mount in or near an air bag deployment zone or where it will obstruct view of the road.**


2. Attach Nüvi to mount ball head by firmly pushing ball (A) into socket on the back of the device (B) as pictured below.

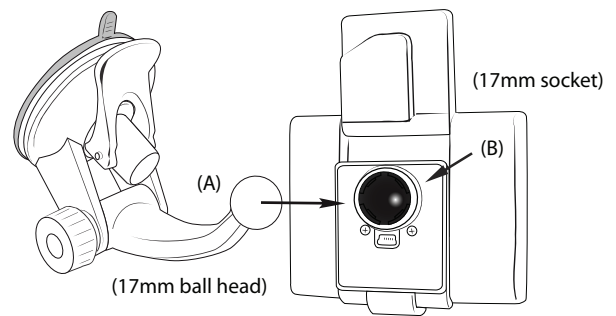


3. Push the pedestal suction cup (C) firmly to the windshield. Flip the lever (D) toward base to secure the suction cup.

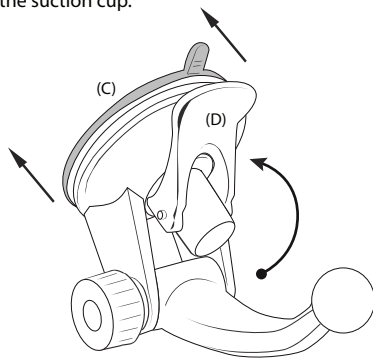


4. Adjust the angle of the arm by loosening the adjustment knob (E).

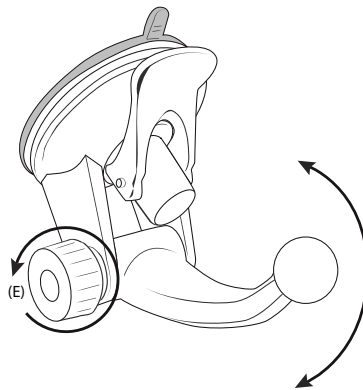

5. Position the Nüvi as desired.

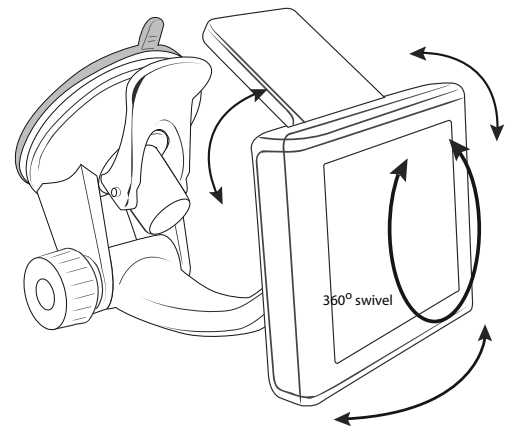


6. To remove, hold the pedestal with one hand and firmly pull Nüvi away from pedestal with your free hand.

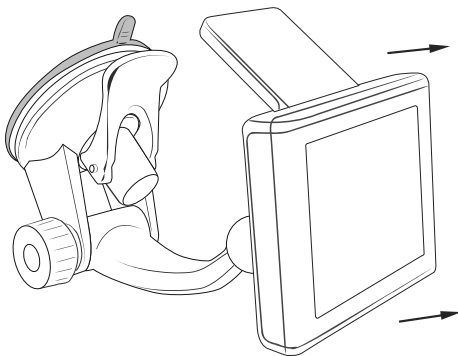

Installation for optional Console Dash Mount (GN115)


1. Remove paper liner from adhesive on mount disk and affix adhesive to the dash. Let stand (at room temperature) for 24 hours before using.

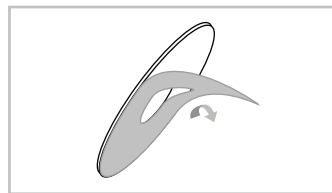

Removal of Dash Mount

To remove the dash mount completely, use a cotton swab dipped in isopropyl alcohol. Simply peel up a corner of the dash mount adhesive and swab under the pad while gently pulling until the adhesive begins to release. Remove slowly. No damage will occur from the adhesive if it has been properly installed and removed per these instructions. You may see a slight discoloration between this area and other parts of your dash due to fading caused by the sun.

2. Push the pedestal suction cup (A) down onto the disk (D). Flip the lever (B) down to secure the suction cup. Adjust the angle of the arm by loosening the adjustment knob (C). Position Nüvi as desired.

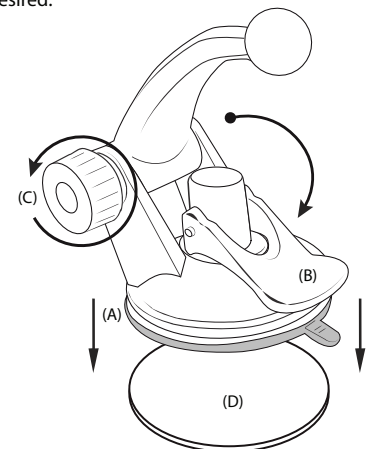

⚠ WARNING:

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon Resources, Inc. is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of the pedestal mount.

ARKON
RESOURCES INC. The Mobile Mounting Specialists™

Consumer Hotline:
(USA) (800) 841-0884
(INT'L) (626) 254-9005
Mon-Fri. 9am-5pm, PST

www.arkon.com
Arcadia, CA 91006 USA
Designed in USA | Made in Taiwan
© Copyright 2009 Arkon Resources, Inc.