

MM212 | Friction Dashboard Mount for Mio® Moov™ 200 Series



Package Contents:

- (1) CM012 - Weighted friction dashboard mount
- (1) CM014-2 - Travelmount® mini windshield mount
- (1) APM200 - Dual-T to Mio Moov 200 pattern adapter plate
- (1) Optional adhesive safety hook (recommended but not required)
- (1) Alcohol cleaning pad

Compatible with:

- Mio Moov 200 Series
- Navman S30 3D GPS


⚠ Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road.

Dash Mount Installation


Step 1. Find a safe location on the vehicle dash that is not in an air bag deployment zone.




Step 2. **Optional Safety hook installation will add extra stability.** Clean the area with the included alcohol pad and let dry. Remove the adhesive backing on the safety hook base. The hook curve must point towards the windshield. Press and hold the hook down on the dash surface for about a minute. Allow 24 hrs. to cure to the dash at room temperature (72° F).

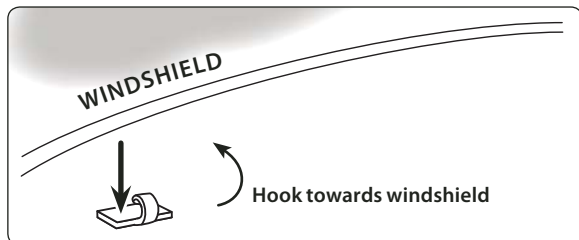


Step 3. Place the loop on the back of the dash mount around the safety hook and place on the dash in front of the hook.

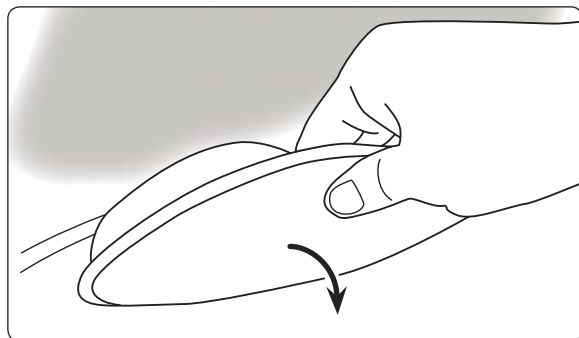


Step 4. Lower the pedestal onto the disc and press down firmly. Flip the locking lever down to secure the pedestal to the dash mount.

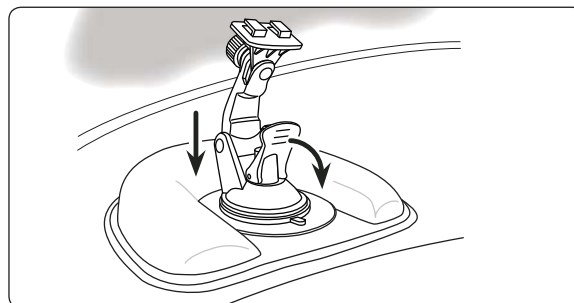

Step 5. Adjust the angle of the arm by tightening the rotation knob.

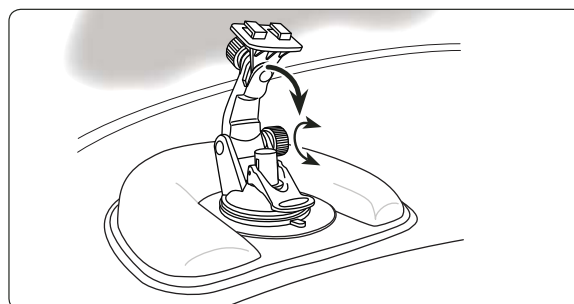

Step 6. Adjust the lateral angle of the pedestal head by tightening the head adjustment knob.

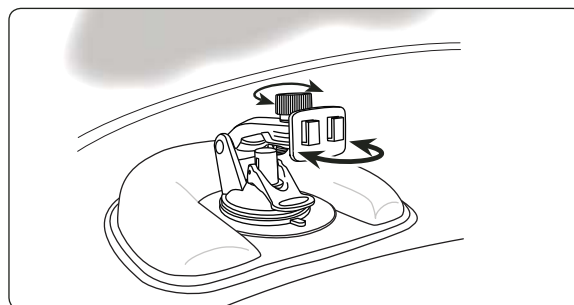

Continued on next side...



Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:

USA (800) 841-0884

INT'L (626) 254-9005

Monday - Friday 9am - 5pm, PST

www.arkon.com


Arcadia, CA 91006 USA

Designed in USA | Made in China and Taiwan

© Copyright 2008 Arkon Resources, Inc.


Connect Adapter Plate to Mio Moov 200 Series Device

Step 1. Connect the Moov adapter plate to Moov 200 device (not included, sold separately) by placing the feet (A) of the adapter into the corresponding notches (B) on the bottom of the device. Holding the thumb tab down (C), insert the upper tooth (D) into the recessed slot on the back of the device.

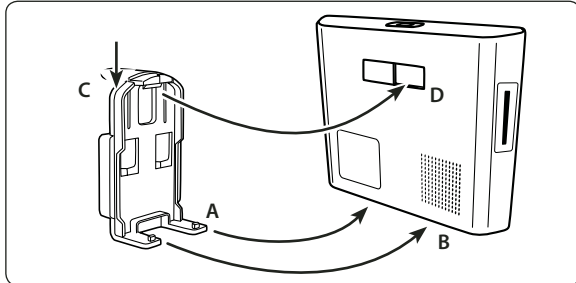

Connect Mio 200 Series Device to Dashboard Mount

Step 1. Connect the dual T-slots (E) on Moov 200 adapter plate to the dual T-tabs (F) on the dashboard mount head.

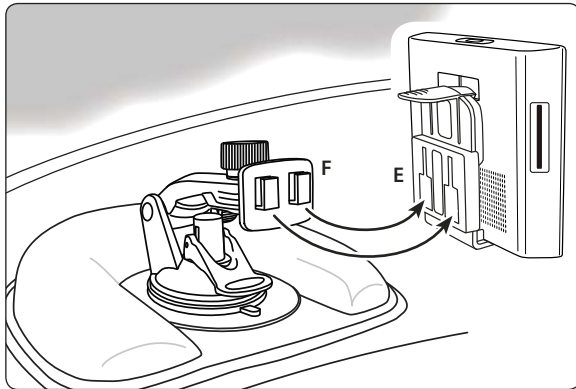

Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:

USA (800) 841-0884

INT'L (626) 254-9005

Monday - Friday 9 am - 5 pm, PST

www.arkon.com

Arcadia, CA 91006 USA

Designed in USA | Made in China and Taiwan

© Copyright 2008 Arkon Resources, Inc.