

MM228 | Multi Angle Adhesive Dash Mount for Mio Moov 200 / Navman S30 3D



Patent Pending

Package Contents:

- (1) CM048-2 - 1" Multi angle adhesive dash mount
- (1) Alcohol cleaning pad and (3) Self tapping screws (optional)
- (1) APMM200 - Dual-T to Mio Moov 200 pattern adapter plate

Compatible with:


- Mio® Moov™ 200 Series
- Navman® S30 3D™ GPS




Drilling into the dash, floor, or console will permanently damage the vehicle. Use caution and consult a mobile install professional to avoid drilling into the gas tank, electrical system or other highly sensitive vehicle components.

Dash or Console Adhesive Mounting

- Step 1. Find a safe location on the dash or console to mount the pedestal. Make sure the area is clean and dry. Use the included alcohol pad to clean the mounting surface.

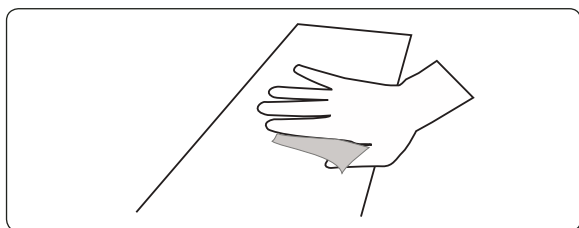

- Step 2. Remove the adhesive backing (A) under the triangular pedestal and firmly press into place.

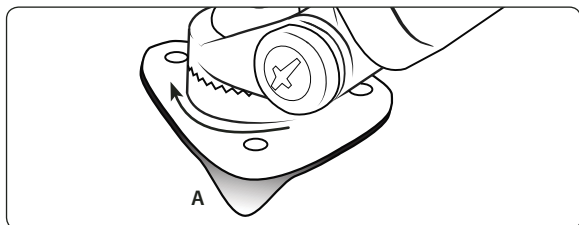


- Step 3. After adhesive has bonded at room temperature (approx. 72° F), allow 24 hours prior to use for best results.
- Step 4. Adjust the angle of the pedestal head by firmly holding the base and rotating to the desired angle.

Dash or Console Screw Mounting (Optional)


- Step 1. Find a safe location on the dash or console to mount the pedestal. Make sure the area is clean and dry. Use the included alcohol pad to clean the mounting surface. Remove the adhesive backing (A) under the triangular pedestal and firmly press into place.
- Step 2. Using a screwdriver, tighten the 3 screws (B) through the pedestal base into the mounting surface. Adjust the angle of the pedestal head by firmly holding the base and rotating to the desired angle.

Continued on next column...

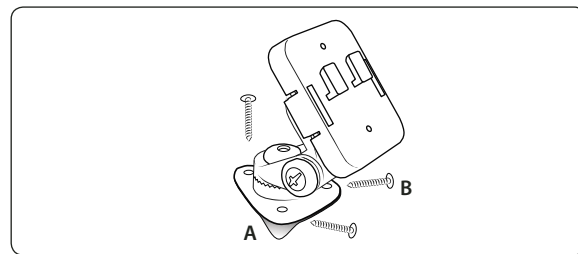


Connect Adapter Plate to Mio Moov 200 Series Device

- Step 1. Connect the Moov adapter plate to Moov 200 device (not included, sold separately) by placing the feet (C) of the adapter into the corresponding notches (D) on the bottom of the device. Holding the thumb tab down (E), insert the upper tooth (F) into the recessed slot on the back of the device.

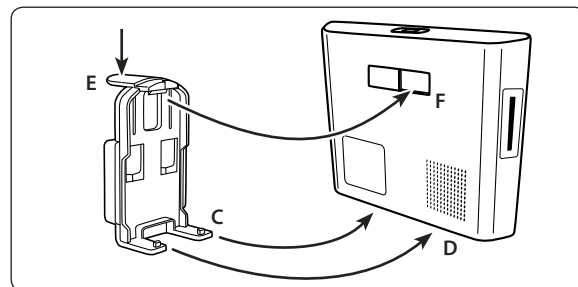

- Step 2. Attach the device to the pedestal by inserting the dual T-Tabs on the pedestal head (G) into the T-slots on the adapter plate (H).

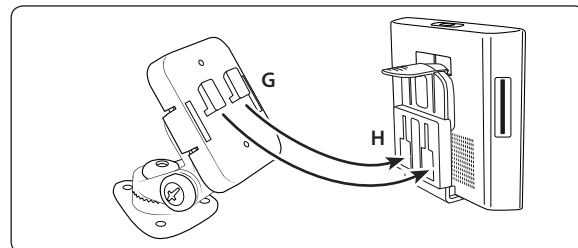

All brand names and product names are trademarks or registered trademarks of their respective owners.



Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:
USA (800) 841-0884
INT'L (626) 254-9005
Monday - Friday 9am - 5pm, PST

www.arkon.com
Arcadia, CA 91006 USA
Designed in USA | Made in China and Taiwan
© Copyright 2008 Arkon Resources, Inc.