

MM311 | Sun Visor Mount for Magellan®, Mio®, and Navman® GPS Devices



Package Contents:

- (1) CM011-2 - Sun visor mount
- (1) APMM300 - Dual-T to pattern adapter plate

Compatible with:


- Magellan Maestro: 3100, 3140, 3200, 3210, 3220, 3225, 3250, 4000, 4010, 4040, 4050, 4210, 4215, 4200, 4220, 4245, 4250, 4350, 4370, 4700, 5310, and 5340
- Magellan RoadMate: 1200, 1210, 1212, 1215, 1220, 1230, 1340, 1400, 1412, 1430, 1440, 1470, 1475T, 2000, 2200T, 2250T, 300, 3000T, 3050T, 360, 500, 500 Plus, 6000T, 700, 760, 800, and 860T
- Magellan Triton: 1500, 200, 2000, 300, 400, and 500
- Magellan Crossover: GPS 2500T
- Mio Moov: 300, 301, 310, 330, 330 Europe, 360, 370 Europe, 380, 500, and Knight Rider Ed.
- Navman: S50, S50 3D, S70, S90i

⚠ Note: Arkon strongly recommends using the visor mount on the passenger side sun visor. Using this mount on the driver's side visor will reduce the driver's view of the road.

Do not place device car charger cords in or near an air bag deployment zone.


Sun Visor Mounting

- Step 1. Lower the passenger side sun visor and place the clip mount over the top of the visor. Slide the mount left or right to adjust the location on the visor.

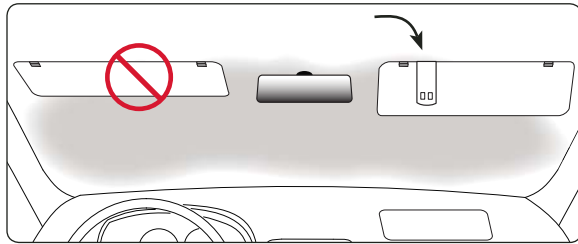

Dual-T Device Attachment

- Step 1. If your Magellan device has dual-T slots on the back, attach the unit to the visor mount by connecting the dual T-slots (A) to the dual T-tabs of the mount (B).

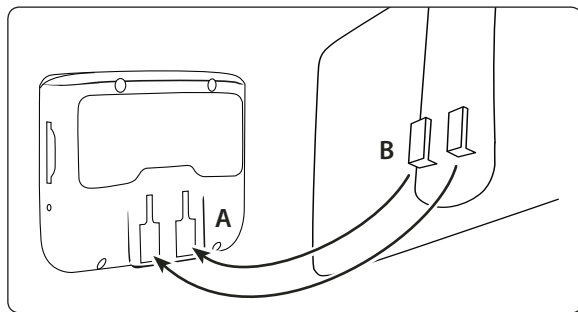

Connect Power Cord to Adapter Plate

- Step 1. Insert the power cord (not included, sold separately) into the grooved slot in the bottom of the adapter plate.


...Continued on next column

All brand names and product names are trademarks or registered trademarks of their respective owners.

⚠ Safety Precautions


Follow all manufacturer safety guidelines for operating your device. Failure to practice safe usage of GPS device while driving may result in damage, injury, or death.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

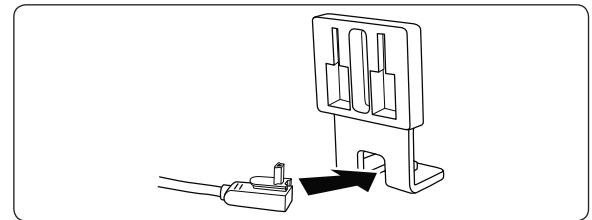


Connect Adapter Plate to Device

- Step 1. Insert the adapter plate with power cord into the vertical groove pattern on the back of the GPS unit (not included, sold separately.)

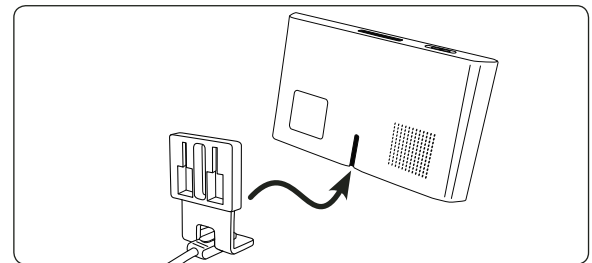

Connect GPS Device to Visor Mount

- Step 1. Connect the dual T-slots (A) on the back of the adapter plate to the dual T-tabs (B) on the sun visor mount.

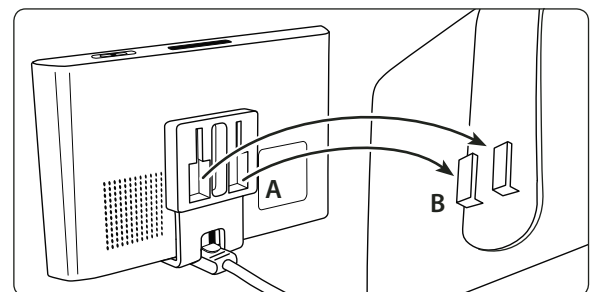

ARKON®
RESOURCES INC. The Mobile Mounting Specialists™

Consumer Hotline:

USA (800) 841-0884

INT'L (626) 254-9005

Monday - Friday 9 am - 5 pm, PST

www.arkon.com

Arcadia, CA 91006 USA

Designed in USA | Made in China

© Copyright 2009 Arkon Resources, Inc.