

MM328 | Multi Angle Adhesive Dash Mount for Magellan®, Mio®, and Navman®



Patent Pending



Package Contents:

- (1) CM048-2 - 1" Multi angle adhesive dash mount
- (1) Alcohol cleaning pad and (3) Self tapping screws (optional)
- (1) APMM300 - Dual-T pattern adapter plate

Compatible with:


- Magellan Maestro: 3100, 3140, 3200, 3210, 3220, 3225, 3250, 4000, 4010, 4040, 4050, 4210, 4215, 4200, 4220, 4245, 4250, 4350, 4370, 4700, 5310, and 5340
- Magellan RoadMate: 1200, 1210, 1212, 1215, 1220, 1230, 1340, 1400, 1412, 1430, 1440, 1470, 1475T, 2000, 2200T, 2250T, 300, 3000T, 3050T, 360, 500, 500 Plus, 6000T, 700, 760, 800, and 860T
- Magellan Triton: 1500, 200, 2000, 300, 400, and 500
- Magellan Crossover: GPS 2500T
- Mio Moov: 300, 301, 310, 330, 330 Europe, 360, 370 Europe, 380, 500, and Knight Rider Ed.
- Navman: S50, S50 3D, S70, S90i



Drilling into the dash, floor, or console will permanently damage the vehicle. Use caution and consult a mobile install professional to avoid drilling into the gas tank, electrical system or other highly sensitive vehicle components.

Dash or Console Adhesive Mounting

- Step 1. Find a safe location on the dash or console to mount the pedestal. Make sure the area is clean and dry. Use the included alcohol pad to clean the mounting surface.

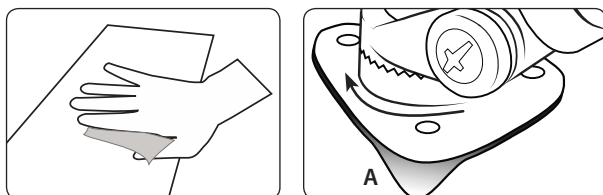

- Step 2. Remove the adhesive backing (A) under the triangular base and firmly press into place.


- Step 3. After adhesive has bonded at room temperature (approx. 72° F), allow 24 hours prior to use for best results.

- Step 4. Adjust the angle of the pedestal head by firmly holding the base and rotating to the desired angle.

Dash or Console Screw Mounting (Optional)

- Step 1. Find a safe location on the dash or console to mount the pedestal. Make sure the area is clean and dry. Use the included alcohol pad to clean the mounting surface. Remove the adhesive backing (A) under the triangular base and firmly press into place.


- Step 2. Using a screwdriver, tighten the 3 screws (B) through the pedestal base into the mounting surface. Adjust the angle of the pedestal head by firmly holding the base and rotating to the desired angle.

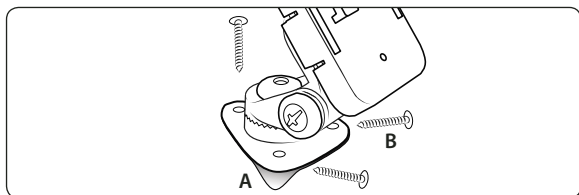

Connect Power Cord to Adapter Plate and Device Attachment

- Step 1. Insert the power cord (not included, sold separately) into the grooved slot in the bottom of the adapter plate.


...continued from previous column

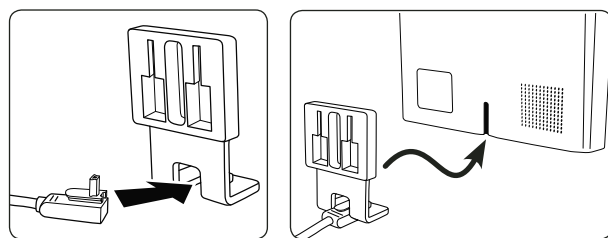

- Step 2. Insert the adapter plate with power cord into the vertical groove pattern on the back of the GPS device (not included, sold separately.)


Connect GPS Device to Dash Mount

- Step 1. Attach the device to the pedestal by inserting the dual T-Tabs on the pedestal head (C) into the T-slots on the adapter plate (D).

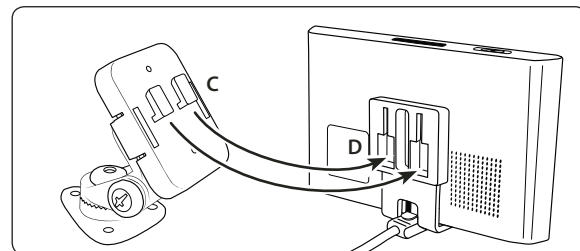

Dual-T Device Attachment

- Step 1. If your Magellan device has dual-T slots on the back, attach the GPS unit to the dash mount by connecting the dual T-slots (E) to the dual T-tabs of the mount head (C).

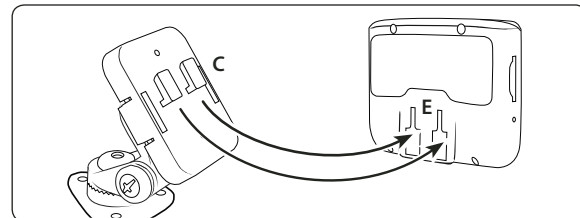

All brand names and product names are trademarks or registered trademarks of their respective owners.



Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:

USA (800) 841-0884

INT'L (626) 254-9005

Monday - Friday 9 am - 5 pm, PST

www.arkon.com

Arcadia, CA 91006 USA

Designed in USA | Made in Taiwan

© Copyright 2009 Arkon Resources, Inc.