

SR100 | Sat-Mount™ Flexible Steel Dash or Console Mount & Removable Vent Mount



CM021-SB-1



CM047-SRVC





AP012

Adapter Plate Instructions (for Sirius receivers only)


Step 1. Secure the adapter plate (A) to the Sirius device cradle (B) by using a screwdriver to secure adapter plate with screws (C) in the cradle.

Step 2. Attach the adapter plate to the pedestal head (D) by inserting the T-tab into the T-slot of the adapter plate.

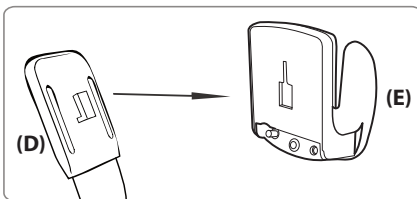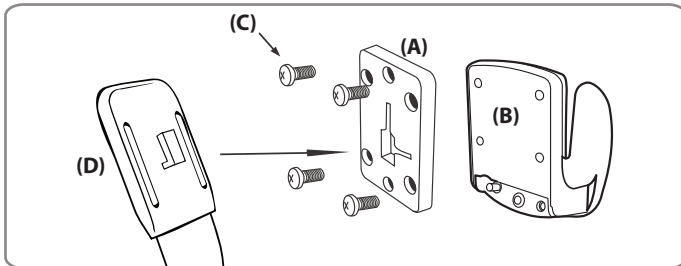

XM Receiver Attachment

Step 1. Attach the XM device cradle (E) directly to the pedestal head (D) by inserting the T-tab into the T-slot of the XM device.

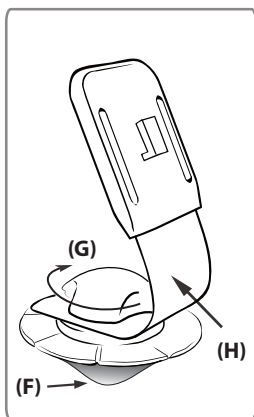

Installation and Pedestal Adjustment (For CM021-SB-1)

Step 1. Find a safe location on the dash or console to mount the pedestal. Make sure the area is clean and dry. Use the included alcohol pad to clean the mounting surface. Remove the adhesive backing (F) under the circular base and firmly press into place.


Step 2. For best results, allow 24hrs prior to use after adhesive has bonded at room temperature (approx. 72°F).

Step 3. Adjust the direction of the pedestal by rotating the top knob on the swivel base (G).

Step 4. Adjust the angle of the pedestal head by bending the flexible metal strap (H).

Air Vent Pedestal Assembly


Step 1. Attach the vent mounting clips (I) to the back of the pedestal (J) with the vent clips positioned with the flat sides facing up.

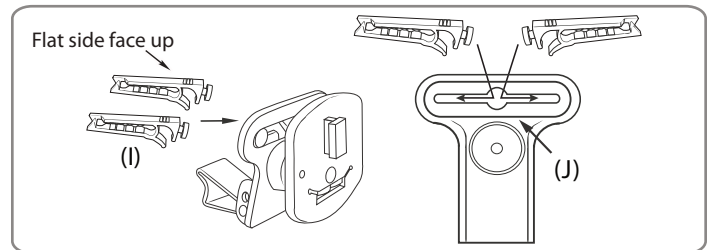

Insertion and Removal of Pedestal into the Air Vent

Step 1. Pinch the vent mounting clips (I) so that the teeth open and gently insert vent pedestal into vent louvres until the mounting clips are attached to the fin/blade of the vent. Adjust the support leg (K) vertically until it rests firmly along the bottom of the vent or dash surface below the vent.

Step 2. Remove the device from the vent mount assembly. Pinch the vent clips (K) so that the teeth open and carefully slide the pedestal from the vent/blade. Make sure the teeth of the vent clips are open enough to not to damage vent.

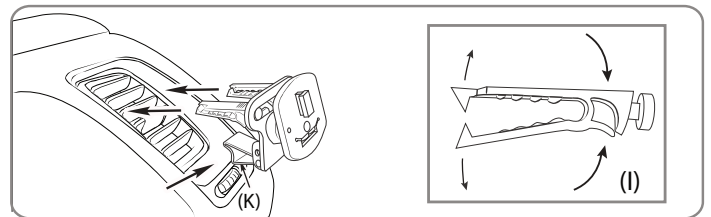

Pedestal Adjustment

Step 1. Adjust the swivel angle of the pedestal head by firmly holding the back of the pedestal (J), pulling out the pedestal head and twisting to the desired angle. Adjust the lateral angle of the pedestal head (L) by simply twisting the head on the pivot axis (M).



Use caution when adjusting the swivel movement to avoid damaging your air vents.



Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon Resources, Inc. is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of the pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:
(USA) (800) 841-0884
(INT'L) (626) 254-9005

www.arkon.com
Arcadia, CA 91006 USA
Made in Taiwan

Mon-Fri. 9am-5pm, PST © Copyright 2007 Arkon Resources, Inc.