

TTEP123 | Cup Holder Mount for TomTom® EasyPort™



CM033-2
Cup Holder Mount



APTTEP
Adapter Plate
for EasyPort

Patent Pending

Package Contents:

- (1) CM033-2 - 5" Cup holder pedestal mount
- (1) APTTEP - Adapter plate for TomTom EasyPort pattern

Note: Mount may not work with adjustable, "pop out" cup holders or oversized cup holder openings found in full-size pickup trucks.

Compatible with:


- TomTom ONE** 125, 125-SE, ONE 130, ONE 130-S, 140, ONE 140-S
- TomTom XL** 325, XL 325-S, XL 325-SE, XL 330, XL 330-S, XL 335 Series, XL 340, XL 340-S, XL 340 LIVE Series, XL 350 Series
- TomTom XXL** 530-S, XXL 535-T, XXL 540-S/WTE, XXL 550 Series
- TomTom PRO** 4000, TomTom PRO 8000
- TomTom ONE** 22, ONE 22 Europe, ONE Europe 22 Assist, TomTom ONE Regional, ONE Regional Assist
- TomTom Europe** 22, XL Regional Assist, XL Europe 22 Traffic,
- TomTom XL** Regional, XL Regional Traffic



Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road.


Cup Holder Mounting

- Step 1. Connect the post (A) to the cup holder base (B) by aligning the groove on the base to the ridge inside the bottom of the post.

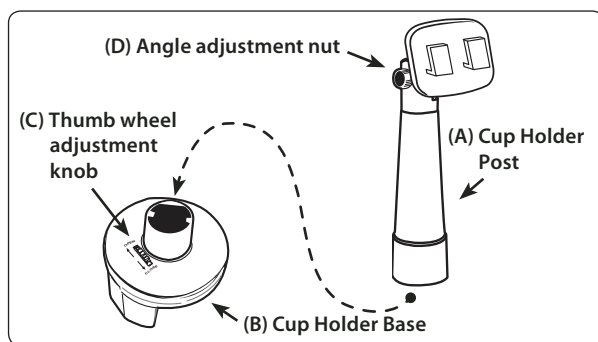

- Step 2. Place the Universal Cup Holder Mount into the designated cup holder in the vehicle. Adjust the thumb wheel adjuster (C) to open or close the cup holder prongs to fit in the cup holder.

- Step 3. For oversized cup holder openings or the adjustable "pop out" cup holders use the optional self-adhesive side support pads (G). Install the pads by removing the adhesive backing and placing it on the flat surface side of the cup holder support leg.

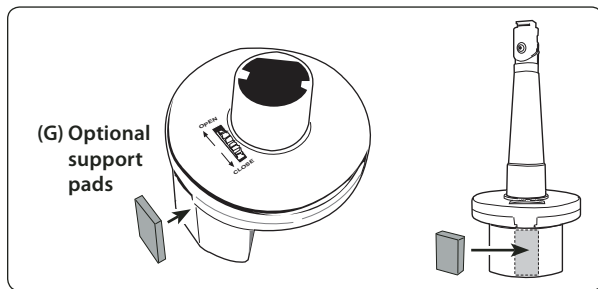


TomTom, ONE, GO, and EasyPort, Start and Ease are product names, trademarks, or registered trademarks of TomTom International b.v. Arkon Resources, Inc. is not affiliated with TomTom International b.v.

Connect Adapter Plate to Pedestal


- Step 1. Connect the dual T-slots (F) on the adapter plate to the dual T-tabs (E) on the head of the cup holder post.

- Step 2. Adjust the angle of the dual T head by tightening the adjustment nut at the top of the post (D).

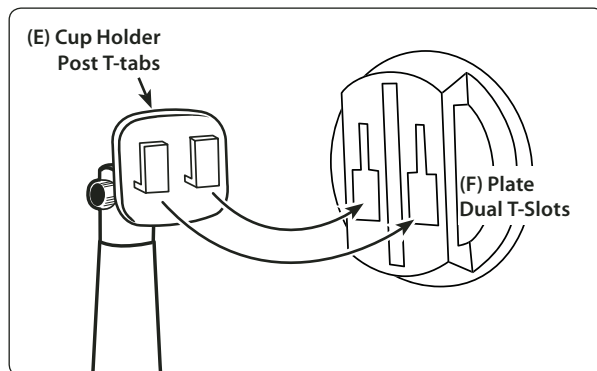

TomTom Device Insertion and Removal

- Step 1. While holding the mounted adapter plate, gently insert the device (not included, sold separately) into the adapter plate until an audible click is heard. The device can then be rotated into the desired viewing angle.

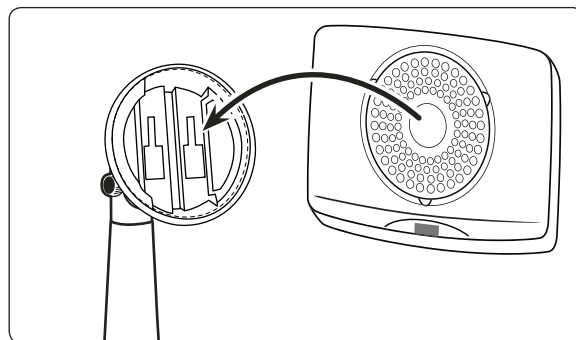

Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:
USA (800) 841-0884
INT'L (626) 254-9005
Monday - Friday 9am - 5pm, PST

www.arkon.com
Arcadia, CA 91006 USA
Designed in USA | Made in China and Taiwan
© Copyright 2010 Arkon Resources, Inc.