

VG928 | PSP Multi Angle Dash Pedestal Mount




Package Contents:

- (1) CM048-2 Dash and Console Mount pedestal with dual T-head snap-on plate
- (1) VG085 Sony PSP™ Cradle
- (3) Screws for optional dash / console mounting
- (1) Alcohol cleaning pad

***Sony PSP™ unit not included**

Designed for semi-permanent or permanent installation

No tools required for adhesive installation
Screwdriver required for optional screw mounting

 Do not install this pedestal in an airbag deployment zone or where vision may be impaired.


Installation Instructions

Dash or Console Adhesive Mounting

- Step 1. Find a safe location on the dash or console to mount the pedestal. Make sure the area is clean and dry. Use the included alcohol pad to clean the mounting surface of residual oils if necessary.
- Step 2. Remove the adhesive backing under the triangular pedestal and firmly press into place. For best results, allow 24 hrs. for adhesive to bond to the mounting surface at room temperature (approx. 72° F) prior to using.



- Step 3. Adjust the angle of the pedestal head by firmly holding the base and rotating to the desired angle.
- Step 4. Attach the dual T-grooves of the PSP cradle to the dual T-head on the pedestal. Carefully insert the PSP unit and adjust angle and rotation if necessary.

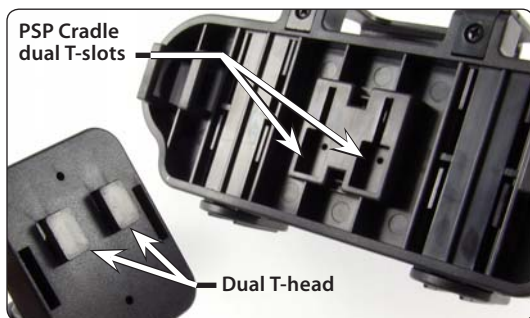

Dash or Console Screw Mounting (optional)

- Step 1. Find a safe location on the dash or console to mount the pedestal. Make sure the area is clean and dry. Use the included alcohol pad to clean the mounting surface of residual oils if necessary. Remove the adhesive backing under the triangular pedestal and firmly press into place.
- Step 2. Using a screwdriver, fasten the 3 screws through the pedestal base into the mounting surface. (See image below)

Warning: Arkon is not responsible if the mounting surface becomes damaged as a result of the installation of this mount.



- Step 3. Adjust the angle of the pedestal head by firmly holding the base and rotating to the desired angle.
- Step 4. Attach the dual T-grooves of the PSP cradle to the dual T-head on the pedestal. Carefully insert the PSP unit and adjust angle and rotation if necessary.

Pedestal Removal

To remove adhesive mount from car or boat surface, apply isopropyl alcohol or Goo-Gone™ solution to adhesive base. This will loosen adhesive grip from applied surface.

Tip: Applying low heat with a blow dryer to adhesive base can help speed up the adhesive removal process.



Safety Precautions

Do not reposition the pedestal while driving. Arkon Resources, Inc. does not promote the adjustment of hand-held devices except when the vehicle is safely parked or stopped.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:
(USA) (800) 841-0884
(INT'L) (626) 254-9005
Mon-Fri. 9am-5pm, PST

www.arkon.com
Arcadia, CA 91006 USA
Made in Taiwan

© Copyright 2007 Arkon Resources, Inc.