




! Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road.

IMPORTANT: Some dashboards with heavily textured or porous surfaces may require you to push down on the suction base while engaging the suction lock lever to achieve the suction required to hold the mount in place.


DASHBOARD MOUNTING WARNING: The sticky suction pedestal SHOULD NOT be used on some types of dashboards. It may leave a PERMANENT indentation on dashboard surfaces made of soft vinyl, leather, or similar materials. To prevent permanent indentation marks, use the included adhesive mounting disk when mounting on soft dashboard surfaces.

*If the sticky suction base becomes dirty or loses stickiness, rinse under warm water and let air dry.

- 1** Clean mounting surface with included alcohol pad to ensure that surface is free of any dashboard conditioners or other treatments. Attach mount to dashboard. Engage suction lock lever.

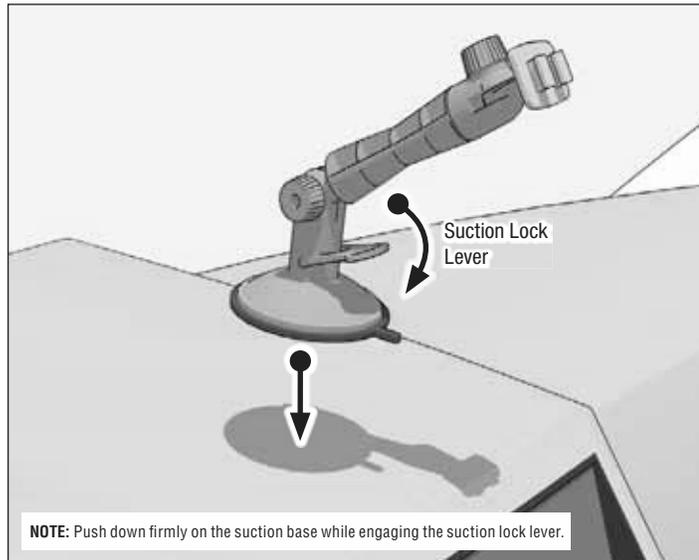


- 2** Connect holder to mount and insert device by pressing down on lower legs to engage the holder's spring-loaded mechanism.

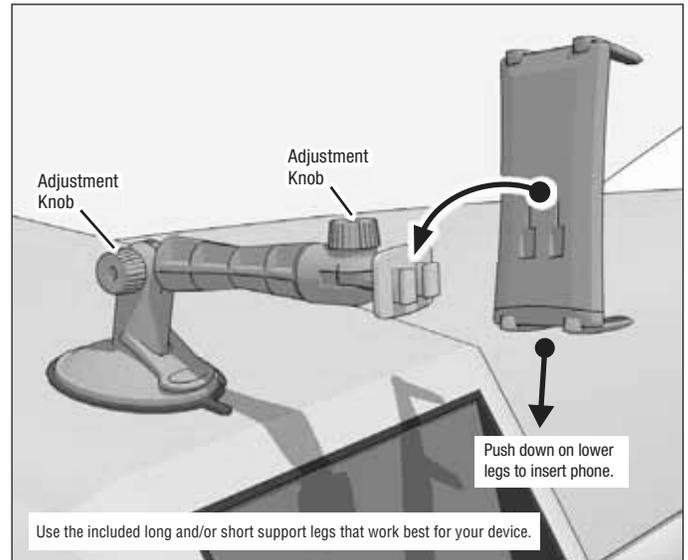

Optional: Use included adhesive disk for mounting on soft dashboards.

Let mounting disk adhesive cure for 24 hours before use.

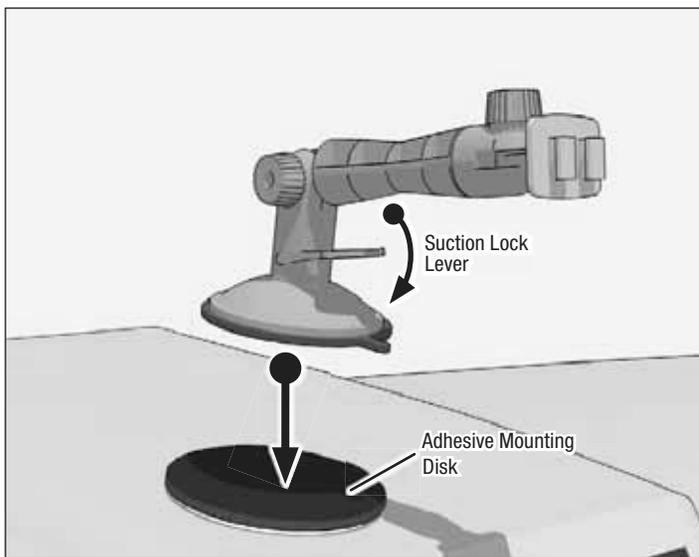

Optional: Can be mounted on the windshield.

